

1L04/56



מדינת ישראל
STATE OF ISRAEL

REC'D 08 MAR 2004

WIPO

PCT

Ministry of Justice
Patent Office

משרד המשפטים
לשכת הפטנטים

This is to certify that
annexed hereto is a true
copy of the documents as
originally deposited with
the patent application
particulars of which are
specified on the first page
of the annex.

זאת לתעודה כי
רצופים בזה העתקים
נכונים של המסמכים
שהופקדו לכתחילה
עם הבקשה לפטנט
לפי הפרטים הרשומים
בעמוד הראשון של
הנספח.


PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

27 -01- 2004

This היום

רשם הפטנטים

Commissioner of Patents

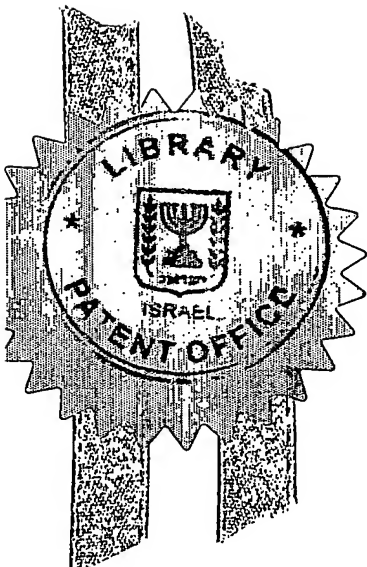

816.1
י"ד מרגוט גנץ
יועצת בכירה לרשם הפטנטים

נתאשר
Certified

לשימוש הלשכה
For Office Use

חוק הפטנטים, התשכ"ז
PATENTS LAW, 5727-1967

ב ק ש ה ל פ ט נ ט
Application for Patent

מספר: Number	154083
תאריך: Date	22-01-2003
הוקדם/נדחה Ante/Post-dated	

אני, (שם המבקש, מענו - ולגבי גוף מאוחד - מקום התאגדותו)
I (Name and address of applicant, and, in case of a body corporate, place of incorporation)

RAFAEL - Armament Development
Authority LTD
Incorporated in Israel
The inventors: Joseph H. Vittoser
Moshe Y. Shushan

רפאל - רשות לפתוח אמצעי לחימה בע"מ

אשר מקום התאגדותו - ישראל
הממציאים: יוסף ויטוסר
משה שושן

בעל אמצאה מכח _____ החוק
Owner, by virtue of _____ The Law of an invention, the title of which is:

(בעברית)
מערכת להגנה בליסטית (Hebrew)

(באנגלית)
(English)

BALLISTIC RESISTANT PLATE AND METHOD FOR PRODUCING SAME

מבקש בזאת כי ינתן לי עליה פטנט.
hereby apply for a patent to be granted to me in respect thereof.

* בקשת חלוקה - Application for Division		* בקשת פטנט מוסף - Application for Patent of Addition		* זרישת דין קדימה Priority Claim		
מבקשת פטנט from Application	מס' / No.	לבקשה/לפטנט to Patent/Appl.	מס' / No.	מספר/סימן Number/Mark	תאריך Date	מדינת האיגור Convention Country
No. _____ dated _____	מס' _____ dated _____	No. _____ dated _____	מס' _____ dated _____			
* יפוי כח: כללי / מיוחד - רצוף בזה / נפרד P.O.A.: general / specific, attached / to be filed later - חוגש בענין _____ Has been filed in case _____						
המען למסירת הודעות ומסמכים בישראל Address for Service in Israel ד"ר יורם צביון ת.ד. 1307 פרדס חנה 37111						
חתימת המבקש Signature of Applicant				היום 21 _____ This 21 _____		
For the Applicant: _____ Yoram Tsivion				ינואר _____ of JANUARY _____		
				לשימוש הלשכה For Office Use		

טופס זה, כשהוא מוטבע בחותם לשכת הפטנטים ומושלם במספר ובתאריך ההגשה, הינו אישור לחגשת הבקשה שפרטיה רשומים לעיל.
This form, impressed with the Seal of the Patent Office and indicating the number and date of filing, certifies the filing of the application,
the particulars of which are set out above.

* מחק את המיותר Delete whatever is inapplicable

BALLISTIC RESISTANT PLATE AND METHOD FOR PRODUCING SAME

5

FIELD OF THE INVENTION

The present invention relates generally to devices for providing defense against bullets, shrapnel and the like. More specifically, the invention is in the field of personal protection against offensive ammunition.

10

BACKGROUND OF THE INVENTION

Ballistic resistant plates (BRPs), sometimes referred to as ballistic resistant armour plates, are used for defending against the effect of bullets and fragments of artillery ammunition and mines. BRPs used for such an end are typically laminated, composed of stacked laminae and covered at one face with ceramic plates. In Fig. 1A to which reference is now made, a schematic description of bullet 20 is shown, projected in the direction of arrow 22, to eventually hit ballistic armour 24. Ballistic armour 24 is a laminated body, made of juxtaposed laminae. In Fig. 1B to which reference is now made, a schematic description of a bullet is shown, wherein bullet 20 has already hit the armour, creating a bulge 42. In the short event of bullet impingement and penetration,

the plies are separated locally, this phenomenon is referred to as local delamination. Thus, as schematically shown in the figure, lamina 44 has separated from lamina 46 by gap 48, whereas lamina 46 has separated from lamina 50 by gap 52. Lamina 54 is separated from lamina 56 only to a very small extent.

Local delamination is exhibited upon the impingement on and penetration of a projectile into a laminated composite ballistic armour. In the course of a delamination, a considerable proportion of the energy of the impinging projectile hitting the armour is dissipated. This phenomenon is taken advantage of in a laminated armour, however, in order to facilitate effective local delamination, the adhesion strength must neither be too weak or rigid nor too strong. A strong adhesion tends to inhibit delamination altogether while weak adhesion would promote loosening of the bonds between the plies without withdrawing energy from the impinging projectile.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1A is a schematic cross sectional view describing a projectile reaching a ballistic composite plate as in the prior art;

Fig. 1B is a schematic cross sectional view describing a projectile
5 hitting a laminated armour plate, creating local delamination as in the prior art;

Fig. 2 is a chart describing the sequence of steps carried out in preparing a laminated armour plate in accordance with the present invention;

Fig. 3 is a schematic cross section in a prepreg of the invention;

Fig. 4 is an enlarged view of the cross section in a prepreg of the
10 invention;

Fig. 5 is a schematic cross section in a stack of prepregs of the invention;

Fig. 6A is a schematic top side view of an armour plate describing the arrangement of ceramic tiles on a face of an armour plate of the invention;

15 Fig. 6B is a schematic sectional view of an armour plate of the invention describing the arrangement of ceramic tiles in the mass of the elastomer on the face of the plate.

DETAILED DESCRIPTION OF THE PRESENT INVENTION

In accordance with the present invention, a stack of pre - impregnated laminae is cured using pressure and heat to form a ballistic resistant plate (BRP). The procedure for preparing the BRP of the invention is described schematically in **Fig. 2** to which reference is now made. In step **60** pre -
5 impregnated slabs, hereinafter referred to as preregs, are prepared. In step **62** the preregs are trimmed to fit – in a certain geometric dimension. In step **64** the preregs are stacked and in step **66** the preregs stack is cured using temperature and pressure.

10

Prepreg preparation

A prepreg in accordance with the present invention consists of a polyaramid fabric plate impregnated with an elastomer resin. The elastomer in accordance with the invention functions as a filler and binder, but does not
15 necessarily interact chemically with the polyaramid fibers. The elastomer is impregnated for example by immersing the fabric in the liquefied form of the precursor of the elastomer, which is typically a dissolved or emulsified monomer. A typical solvent is xylene. The elastomer/solvent ratio effects the amount of elastomer deposited in the prepreg, and hence some of the ballistic
20 and mechanical properties of the prepreg. By controlling the elastomer/solvent ratio a control of the delamination tendency of the armour plate can be achieved. To describe its structure, reference is made to **Fig. 3**, which is a schematic description of a prepreg **80** of the invention. In a front cross sectional view **82** of the prepreg, bundles **84** of the polyaramid fabric are shown, the
25 bundles of the fabric are embedded in the semi – hardened matrix **86** of the

non – cured elastomer monomer. In **Fig. 4** to which reference is now made, an enlarged portion of the sectional view of the prepreg **80** is shown. Bundles **84** are composed of filaments, designated **88**. Matrix **86** fills the space between the upper **90**, and the lower **92** faces of the prepreg.

5 After impregnation, the solvent is evaporated, leaving the prepreg dried, non – sticky, and stiff enough to be easily handled.

Piling up a stack and curing the elastomer

After drying, the prepregs are trimmed to a specific size which
10 determines the vertical dimensions of the stack. A stack of prepregs is described schematically in **Fig. 5** to which reference is now made. Prepreg **102** is laid over prepreg **104**, laid over prepreg **106**, and over **108**, respectively. The elastomer monomer now forms a continuum throughout the cross section of the stack.

15 Once the stack is formed, curing can take place, typically by applying temperature and pressure on the piled stack. The pressure can be applied by a mechanical means such as a press or isostatically by means of compressed gas in a closed chamber. Temperatures used in such curing are recommended
20 technical data publications regarding various curing techniques. Chloroprene is an exemplary elastomer precursor, known as Neoprene after curing. If rubber is used as an elastomer, vulcanization is applied as a curing method.

As a result of the curing process, (or vulcanization in the case of rubber) a laminated BRP plate is obtained, wherein a continuum of the
25 elastomer spans the laminae between both faces of the BRP. In other words, in

a cross section of the BRP, the cured elastomer forms a continuum, in which polyaramid fabric layers are embedded.

Ceramic tile application

5 The use of elastomers in the preparation of a BRP lends itself to straightforward attachment of ceramic tiles on a face of the BRP. In a preferred embodiment of the invention, ceramic tiles are fixed to BRP using the same elastomer as the one used to prepare the BRP. In Fig 6A to which reference is now made, a part of an armour plate 120 of the invention is shown as viewed
10 from the top side, in which ceramic tiles 122 are embedded in the elastomer 124 of the armour. A side view of the armour of the invention is shown in Fig. 6B to which reference is now made. Tiles 122 are shown embedded in the elastomer 124 at the top side of the armour plate.

Operational benefits of using an elastomer as a binder and filler 15 in accordance with the present invention

Experiments prove that a BRP prepared in accordance with the present invention provides for extended durability as compared to other BRPs. A BRP prepared in accordance with the present invention is able to stand more
20 rounds of ammunition shot at from the same distance other makes of BRPs were shot at. The extended durability of a BRP of the invention means that the product of the invention is able to provide protection for a user, against more rounds of ammunition shot at.

CLAIMS

1. A ballistic resistant armour comprising a laminated plate,
wherein a stack of laminae is bound by an elastomer and
wherein each lamina comprises:

- a polyaramid fabric;
- an elastomer impregnated in said fabric, and

wherein said elastomer forms a continuum throughout said
stack of laminae.

2. A ballistic resistant armour as in claim 1 and wherein to one
face of said laminated plate are attached ceramic tiles
embedded in said elastomer.

3. A method for producing ballistic resistant armour using
polyaramid fabric plates , comprising the steps of:

- preparing preregs by impregnating a plurality of
said fabric plates with a liquefied form of an
elastomer monomer;
- drying said preregs
- trimming said preregs;
- forming a stack of said preregs, and
- curing said stack;

4. A method for producing ballistic resistant armour as in claim 3 and wherein said curing comprises heating and pressing said stack.

5 5. A method for producing ballistic resistant armour as in claim 3 and wherein vulcanization is applied in said curing step.

6. A method for controlling the delamination tendency of a laminated armour plate impregnated with an elastomer, by
10 changing the amount of elastomer impregnated in said laminated armour plate.

7. A method for fixing ceramic tiles to a laminated ballistic armour plate, wherein said tiles are embedded in a face of a continuum
15 of an elastomer spanning said armour plate.

For the Applicant:

Yoram Tsvion



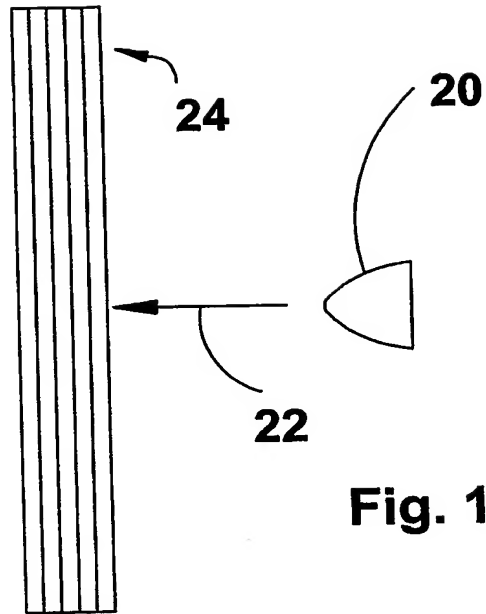


Fig. 1A

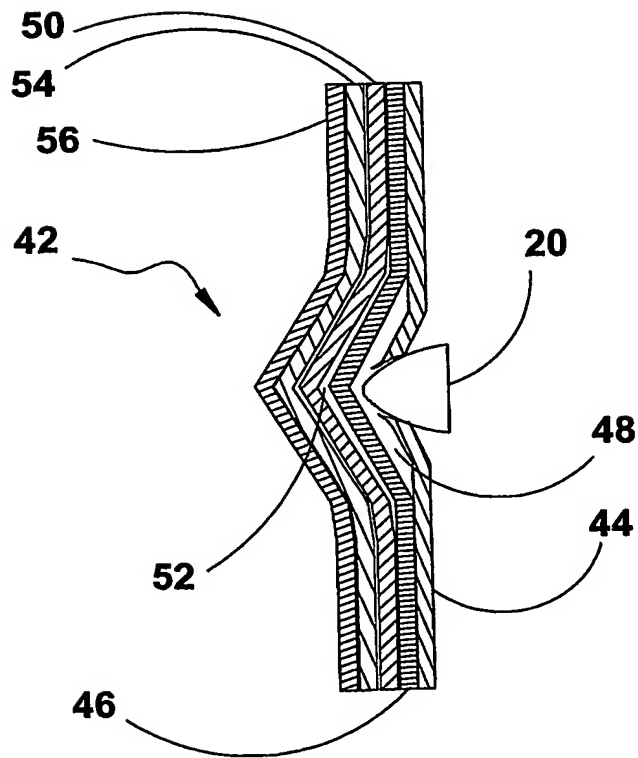


Fig. 1B

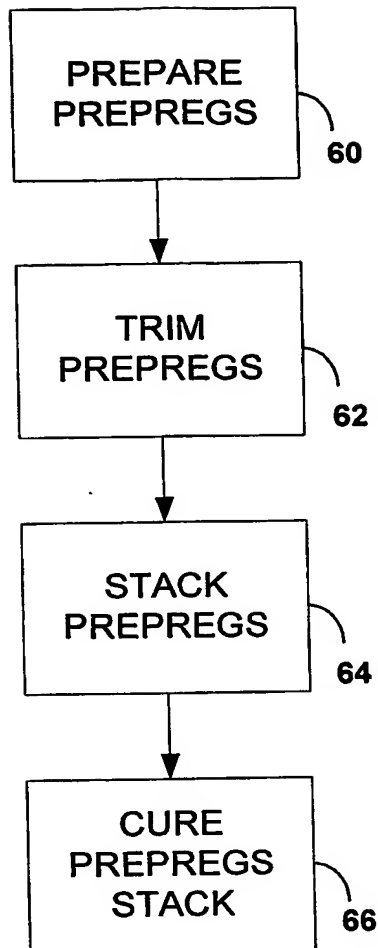


Fig. 2

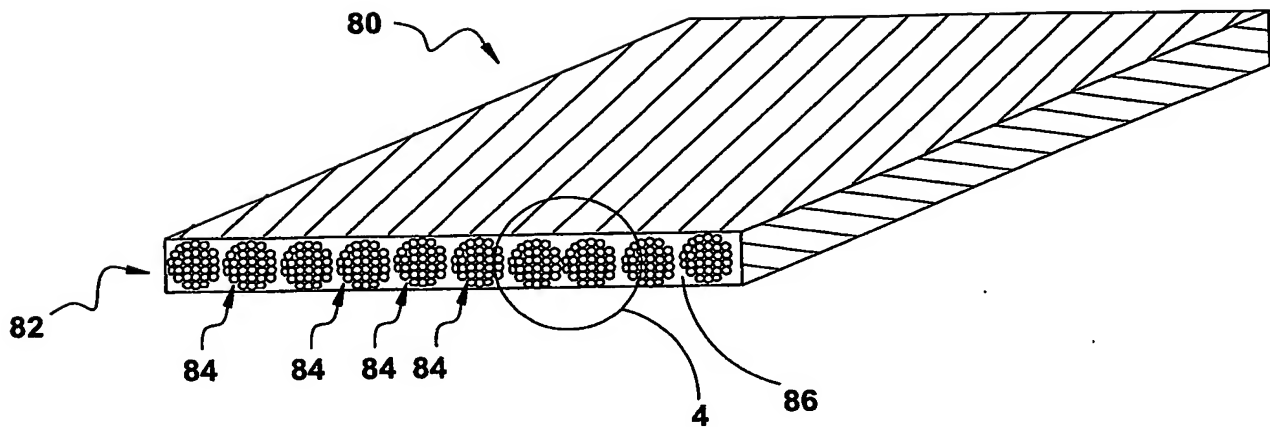


Fig. 3

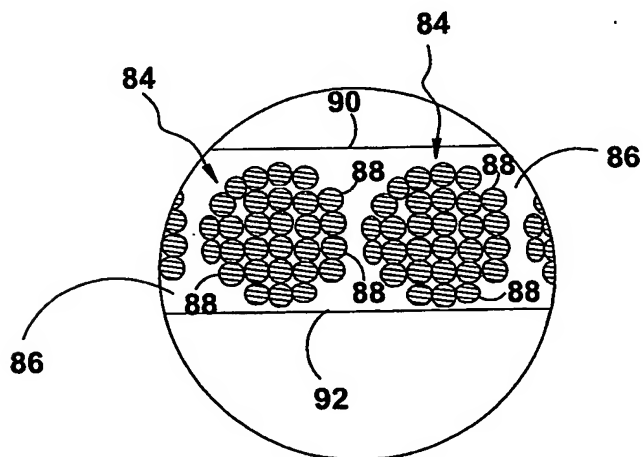


Fig. 4

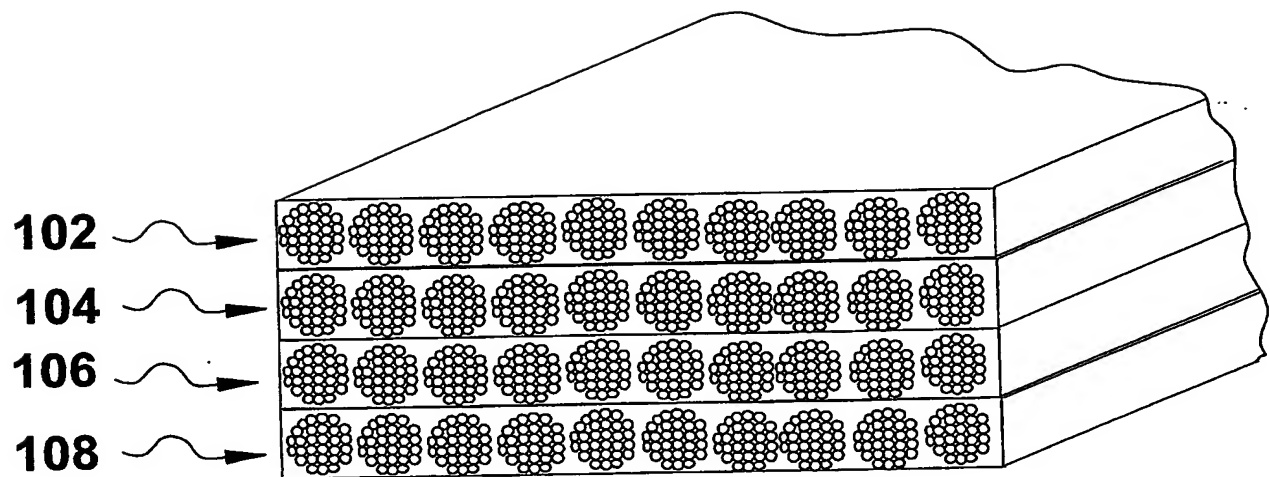


Fig. 5

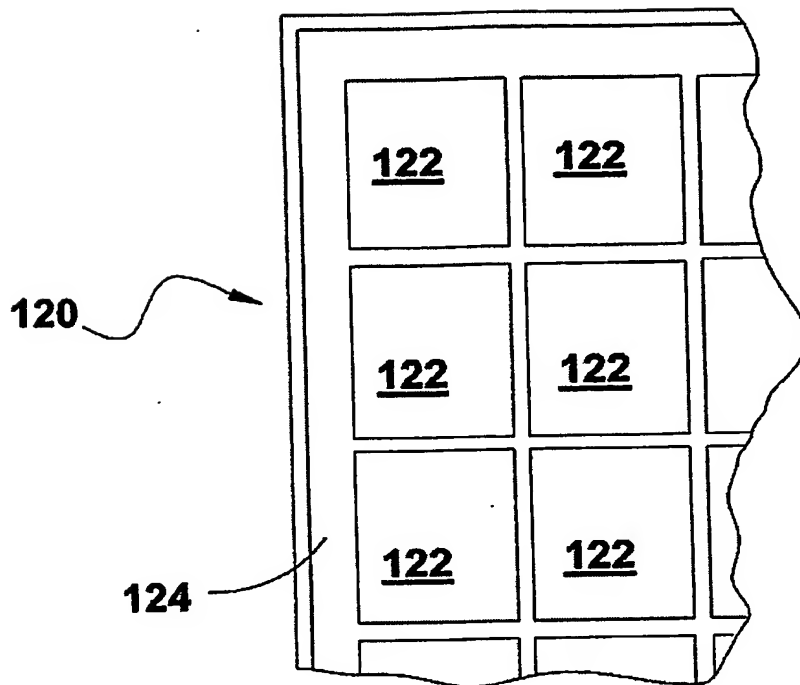


Fig. 6A

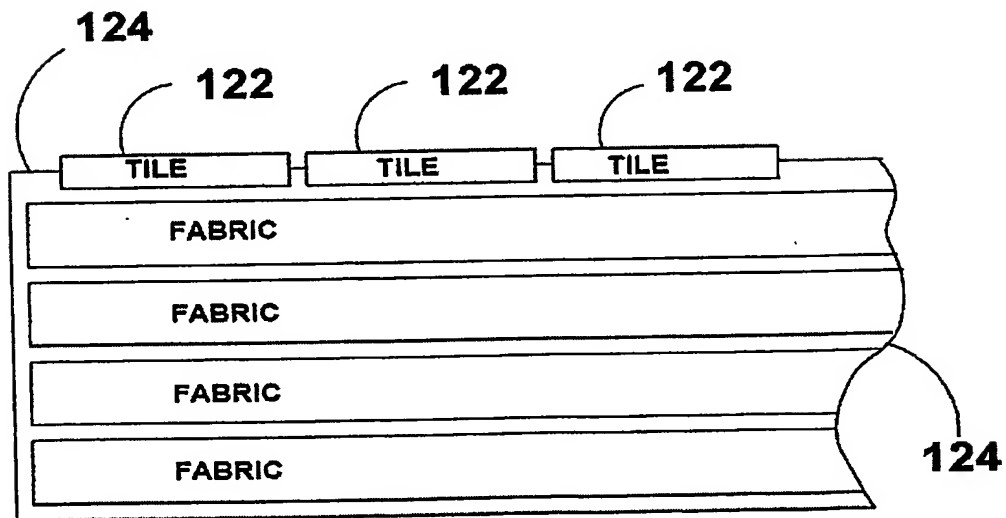


Fig. 6B